

# diamant/cbn industrie

**Schleifkegel**  
*Reamers (conic male), 14%*

**TYPE 70**

**Schleifhülse**  
*Reamers (conic female), 14%*

**TYPE 72**

**Finzler, Schrock & Kimmel GmbH**  
Arzbacher Straße 55-57  
D-56130 Bad Ems  
Tel.: +49 (0) 26 03 / 9 60 30  
Fax: +49 (0) 26 03 / 9 60 3-70  
e-Mail: [industrie@fis-online.com](mailto:industrie@fis-online.com)  
Internet: [www.fis-online.com](http://www.fis-online.com)



**TYPE 70 - Schleifkegel 14%**  
*Reamers (conic male), 14%*

D1 (mm)	D2 (mm)	T (mm)	Nuten, Grooves	
			Anzahl Number	Breite (mm) Width (mm)
11,5	4,5	50	2	2
12,0	5,0	50	2	2
13,0	6,0	50	3	2
14,0	7,0	50	3	2
15,0	8,0	50	3	3
16,0	9,0	50	3	3
17,0	10,0	50	3	3
18,0	11,0	50	3	3
19,0	12,0	50	3	3
20,0	13,0	50	5	3
21,0	14,0	50	5	3
22,0	15,0	50	5	3
23,0	16,0	50	5	3
24,0	17,0	50	5	3
25,0	18,0	50	5	3
26,0	19,0	50	5	3
27,0	20,0	50	5	3
28,0	21,0	50	7	3
29,0	22,0	50	7	3
30,0	23,0	50	7	3
31,0	24,0	50	7	3
32,0	25,0	50	7	3

**TYPE 72 - Schleifhülsen 14%**  
*Reamers (conic female), 14%*


D1 (mm)	D2 (mm)	T (mm)	Nuten, Grooves	
			Anzahl Number	Breite (mm) Width (mm)
11,7	7,5	30	3	3
12,7	8,5	30	5	3
13,7	9,5	30	5	3
14,7	10,5	30	5	3
15,7	11,5	30	5	3
16,7	12,5	30	5	3
17,7	13,5	30	5	3
18,7	14,5	30	5	3
19,5	15,5	50	5	3
20,5	16,5	50	5	3
21,5	17,5	50	5	3
22,5	18,5	50	5	3
23,5	19,5	50	5	3
24,5	20,5	50	5	3
25,5	21,5	50	5	3
26,5	22,5	50	5	3
27,5	23,5	50	5	3
28,5	24,5	50	7	3
29,5	25,5	50	7	3
30,5	26,5	50	7	3
31,5	27,5	50	7	3
32,5	28,5	50	7	3

**INFO**

Andere Steigungen und Abmessungen auf Anfrage  
*Other gradients and dimensions on request*

**TOLERANZEN, TOLERANCES**

Durchmesser, diameter  $\pm 0,05$  mm  
 Winkel, angle  $\pm 10'$

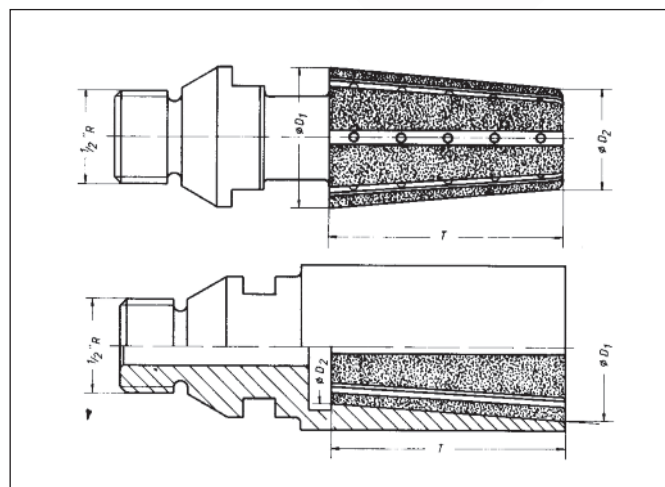

**Certified quality:**  
 DIN EN ISO 9001:2015